Philips
Component video cable

6 ft

SWV3302W

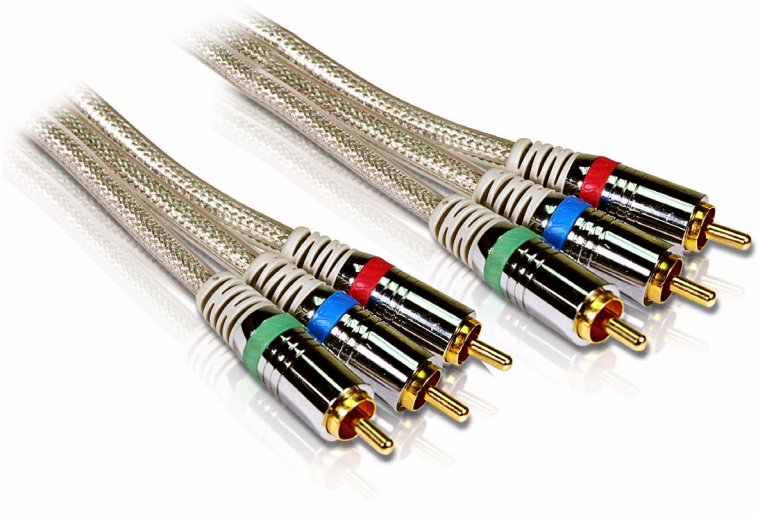

Turn up your viewing experience

with this component video cable

Step up to a better audio/video connection between components.

Enjoy better picture quality
- 24 carat gold-plated connectors optimize signal

Enjoy better audio quality
- High purity copper conductor for reliable signal transfer

Protects against signal loss
- Copper braided reinforced aluminum shielding

Easy installation
- Color coded connectors for instant recognition
- Non-slip ergonomic grip for easy use
- Plug and play for easy use

Enjoy extended durability
- Flexible PVC jacket
- Rubber strain relief
- Protective metal shell for extended durability

PHILIPS
sense and simplicity

Component video cable
6 ft

SWV3302W/27

Specifications

Packaging dimensions
- Packaging dimensions (W x H x D): 19.7 x 26.7 x 3.2 cm
- Nett weight: .181 kg
- Gross weight: .227 kg
- Tare weight: .046 kg

Outer Carton
- Outer carton (L x W x H): 27.9 x 20.3 x 20.3 cm
- Nett weight: .724 kg
- Gross weight: 1.361 kg
- Tare weight: .637 kg

Product highlights

Color-coded connectors
Color coded connections make it easy to install your cable into the correct inputs and outputs

Flexible PVC Jacket
Flexible PVC jacket provided protection to the delicate core of the cable. It also offers extended durability and ease of installation.

Rubber strain relief
Rubber strain relief provides a secure, yet flexible juncture between the cable and the plug.

Braided shielding
Copper braided reinforced aluminum shielding protects against signal loss and interference.

Easy grip
This non-slip grip makes connecting your components easy and ergonomically comfortable.

Plug and play
Plug and play offers easy installation of components without time-consuming installations.

Metal shell
The metal shell protects the internal connection of the cable. It ensures durability and the reliability of your connection.

24 carat gold-plated connector
24 carat gold-plated connectors ensure the best signal quality for your components.

High purity copper
This copper conductor provides high accuracy in signal transfer with minimal resistance.

Issue date 2008-08-19

Version: 1.0.5

12 NC: 8670 000 37048
UPC: 6 09585 14833 8

© 2008 Koninklijke Philips Electronics N.V.
All Rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com